

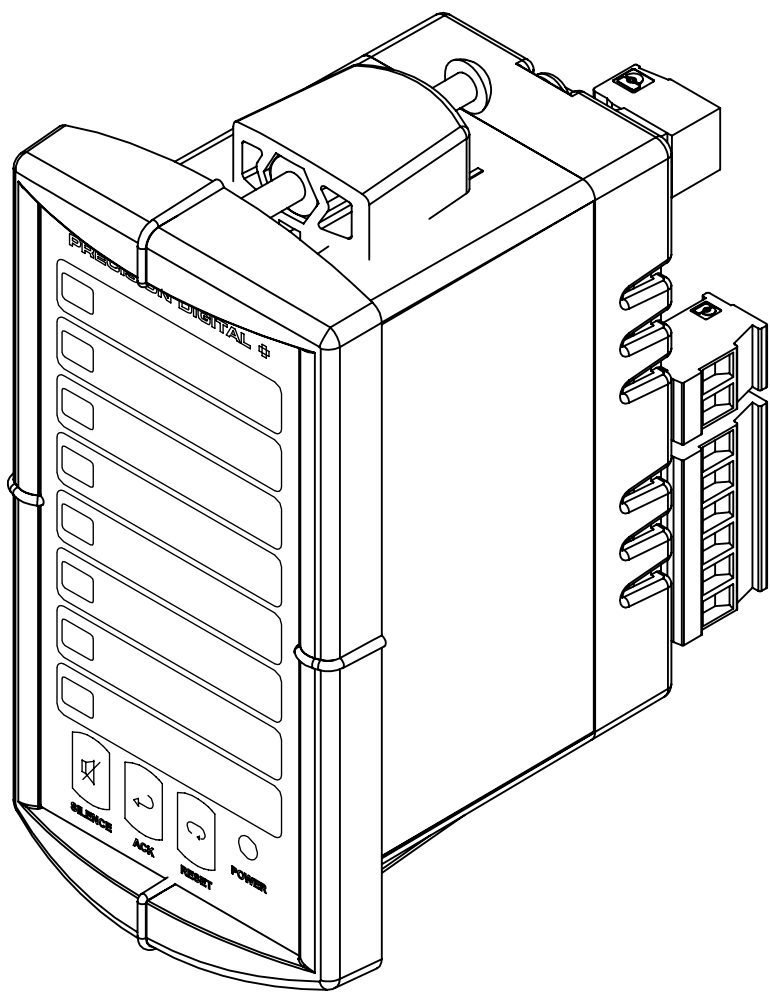



BOTTOM VIEW

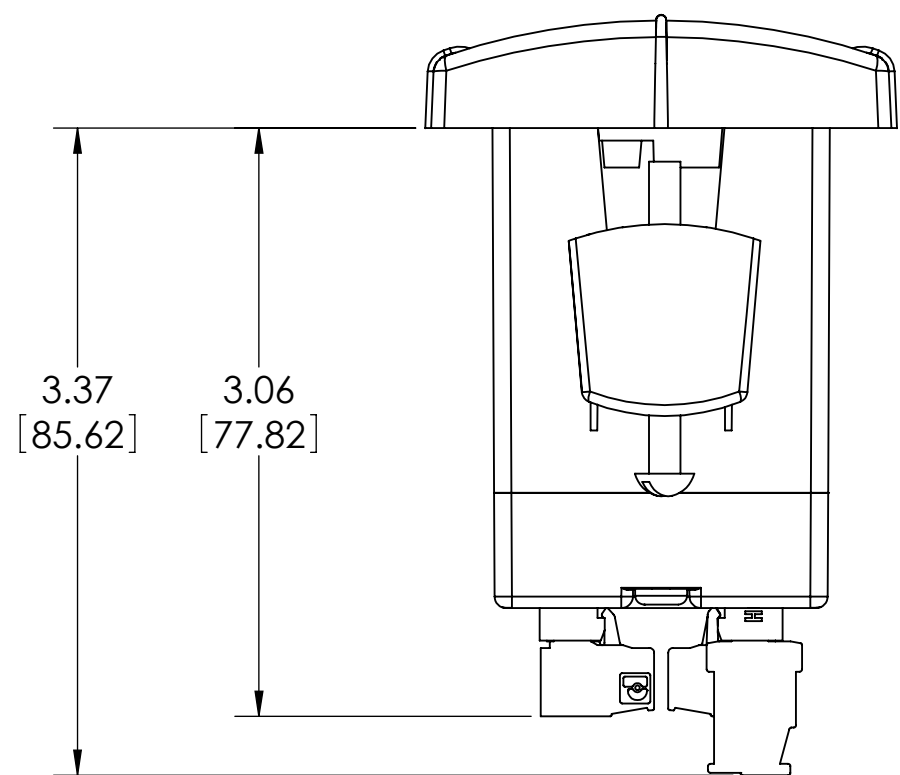


FRONT VIEW

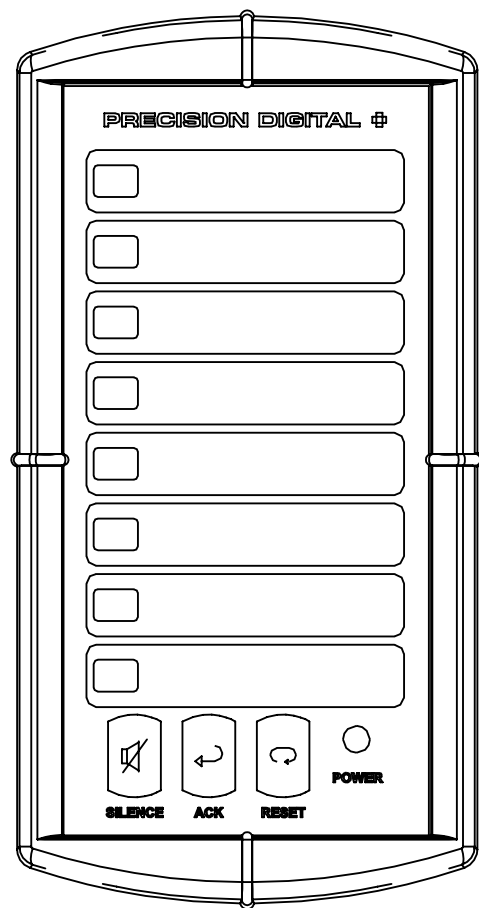

REAR VIEW

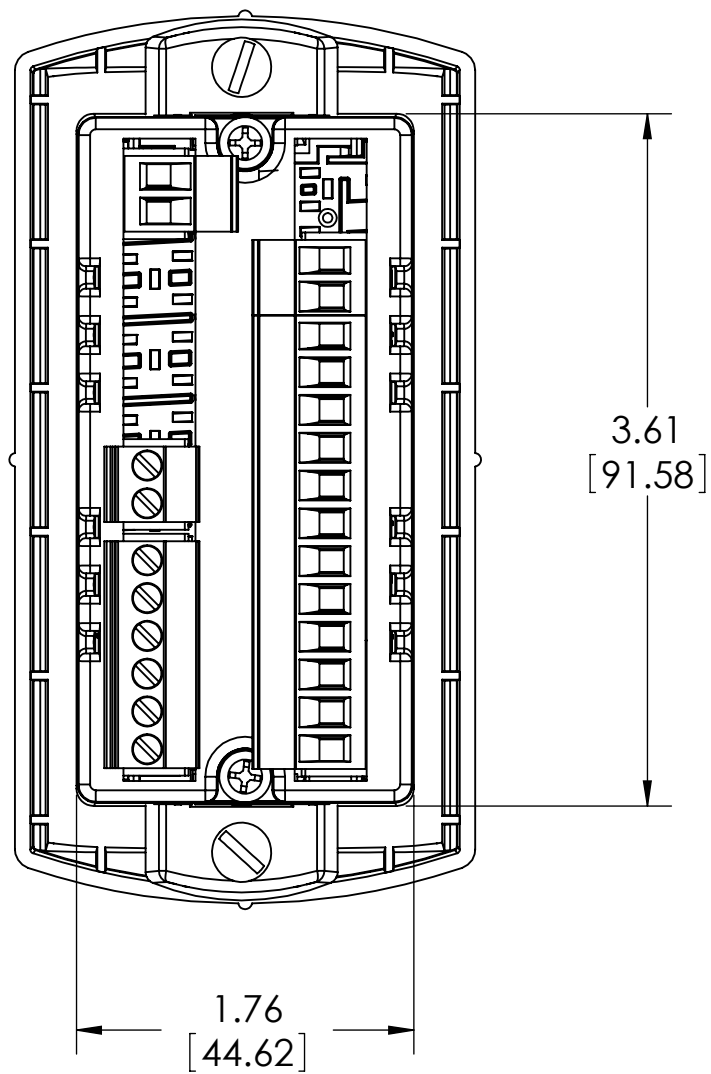

SIDE VIEW

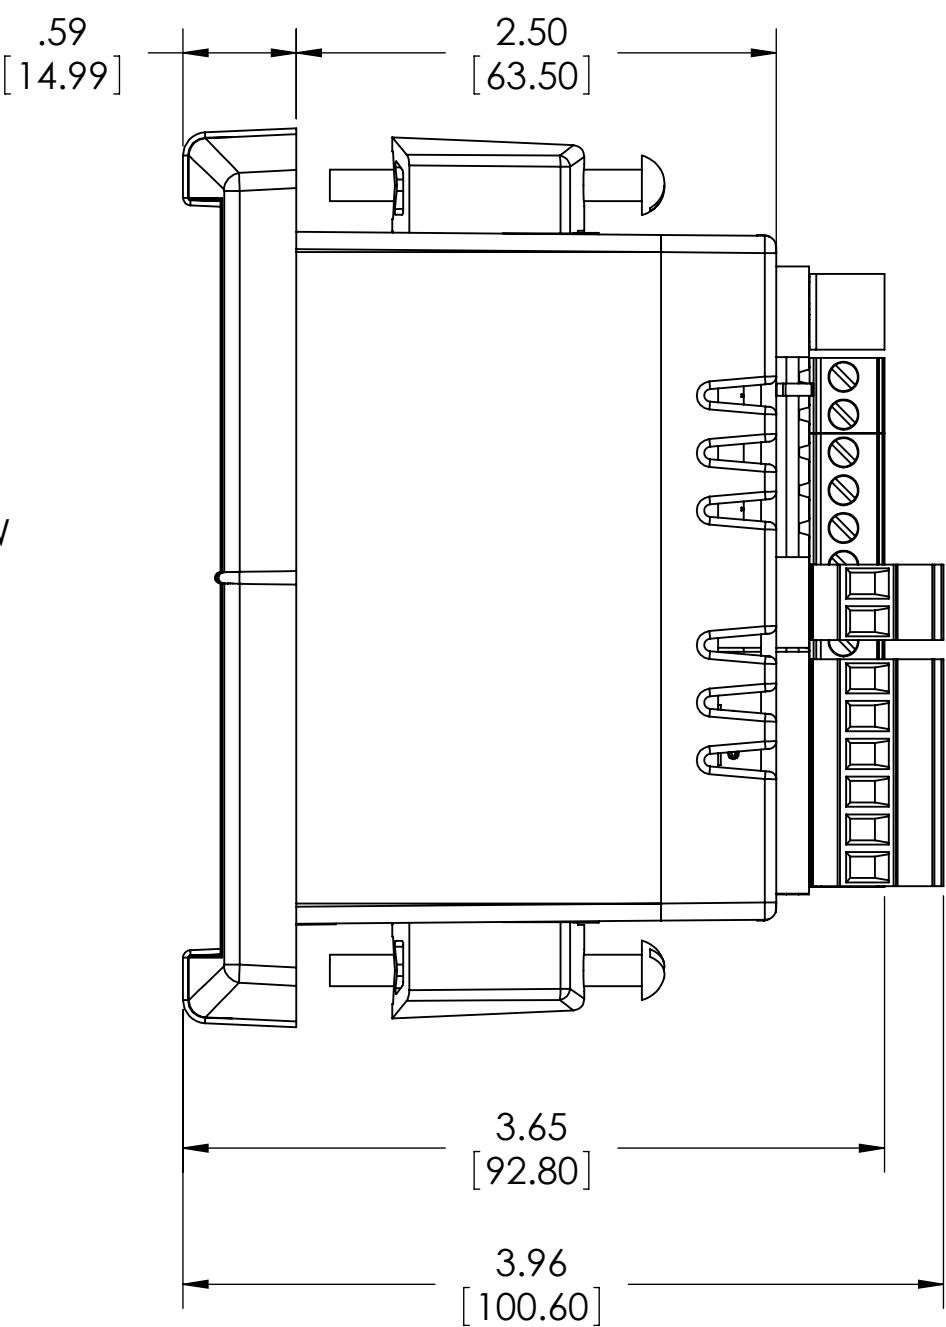

- NOTES:
1. DIMENSIONS ARE IN INCHES [mm].
 2. PD158-6R2-1 IS SHOWN. REAR TERMINALS MAY VARY WITH MODEL NUMBER.
 3. MOUNTING BRACKETS ARE REPRESENTATIVE ONLY, SIZE AND LOCATION MAY VARY BY INSTALLATION.
 4. INTERNAL ELECTRONICS AND MOUNTING GASKET NOT SHOWN.
 5. RECOMMENDED 1/8 DIN INSTALLATION CUTOUT SIZE OF 1.772" x 3.622" (45 mm x 92 mm) (W x H).
 6. ALLOW AT LEAST 4" BEHIND PANEL FOR WIRING.
 7. PANEL THICKNESS 0.04" - 0.25" (1.0 mm - 6.4 mm).
 8. RECOMMENDED MINIMUM PANEL THICKNESS TO MAINTAIN TYPE 4X:
0.06" (1.5 mm) STEEL PANEL
0.16" (4.1 mm) PLASTIC PANEL